

NEVALS



IMAGINE THE POSSIBILITIES

PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •
PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE • PROZORI • VRATA • AL. FASADE •



PROZORI • VRATA • AL. FASADE

FENSTER • TOURIN • AL. FASADEN • WINDOWS • DOORS • AL. FACADE

**TRNSKA CESTA BB
88220 ŠIROKI BRIJEG
BOSNA I HERCEGOVINA**

**TEL: + 387 39 703 097
TEL/FAX: + 387 39 701 453**

**WWW.NEVALS.COM
INFO@NEVALS.COM**



FENSTER • TOURIN • AL. FASADEN • WINDOWS • DOORS • AL. FACADE



FEAL

Termo 65

Tehničke karakteristike



Dubina okvira: 65 mm
Dubina krila: 73 mm
Mjera preklopa: 8mm
Dubina ispune: 21-50 mm
Poliamidne trake: 22 mm
Euro žlijeb

Izračun koeficijenta prolaza topline Uw - termo 65

Prema prEN 10077-2 dimenzije prozora su 1230x1480 mm

*Ug = 0.6 W/m²K

Uw = 1.3 W/m²K

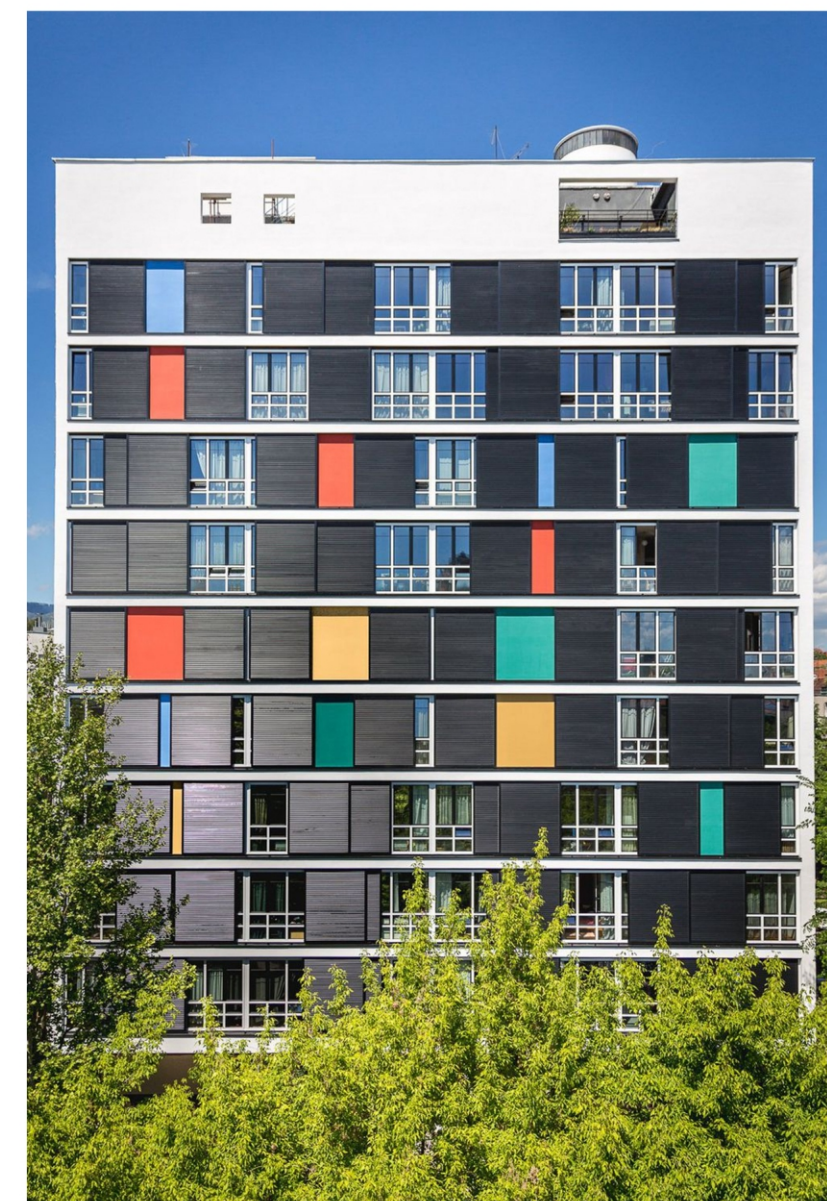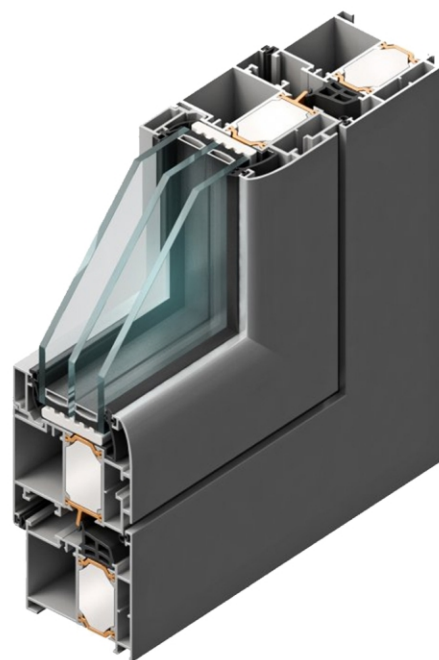



IMAGINE THE POSSIBILITIES




FEAL

Termo 120 /Klizno/

Tehničke karakteristike

Dubina okvira: 185 mm za tri k
120mm za dvije
Dubina krila: 50 mm
Dubina ispune: 3 - 30 mm
 $U_w \geq 1.5 \text{ W/m}^2\text{K}$

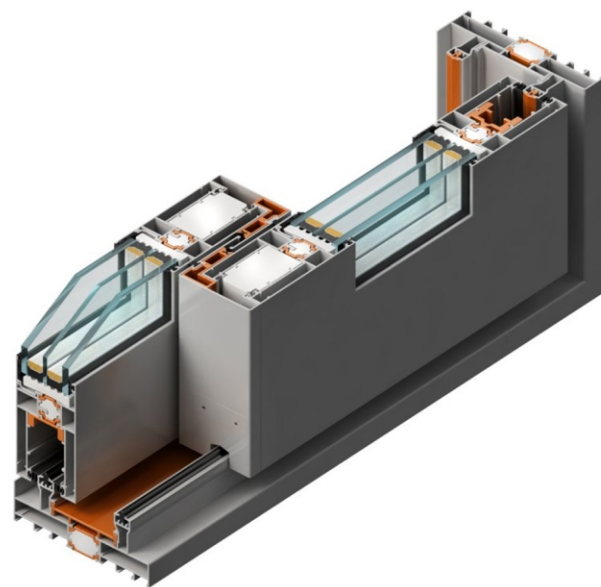

Alumil
Building excellence every day

S650

Tehničke karakteristike

Performanse
 U_w 1,1 $\text{W/m}^2\text{K}$
Vodonepropustljivost e1050
Propustljivost vazduha 3
otpornost na udar vetra c3
Otpornost na provale rc2
Dubina krila 67,4 mm
 U_f od 3,8 $\text{W/m}^2\text{K}$
Vrste tipologija dvostruka horizontalno klizna krila,
sučeono klizanje, ugaone tipologije
Tezina krila do 700 kg
Minimalna vidljiva visina aluminijuma skriven profil





FEAL


Termo 85

Tehničke karakteristike

Dubina okvira: 77 mm
Dubina krila: 85 mm
Mjera preklopa: 8 mm
Dubina ispune: 30-64 mm
Poliamidne trake: 34 mm
Euro žlijeb

Izračun koeficijenta prolaza topline Uw - Termo 85

Prema prEN 10077-2 dimenzije prozora su 1230x1480 mm
 $U_g = 0.6 \text{ W/m}^2\text{K}$
 $U_w = 1.1 \text{ [W/m}^2\text{K]}$

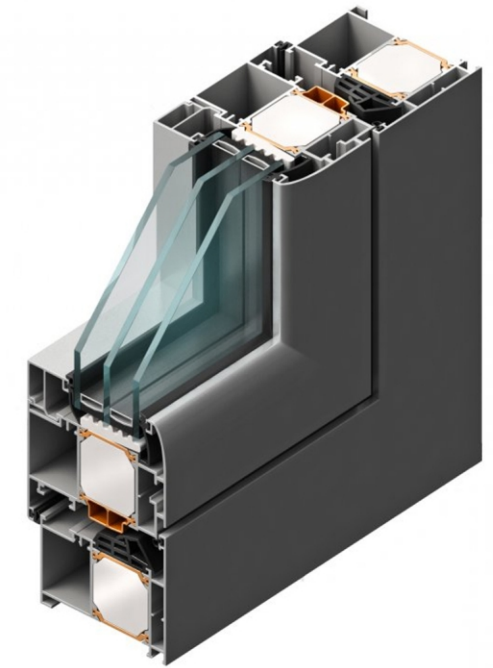



SCHÜCO

Corona CT 70 AS

topl. izolativnost, EN ISO 10071-2: $U_f=1.1-1.7 \text{ W/m}^2 \text{ K}$
materijal za brtvljenje (EPDM): DIN 7863
kontrola kvalitete: DIN EN ISO 9001

karakteristike sistema prema HRN EN 14351

zrakopropusnost:	HRN EN 12207:	klasa 4
vodonepropusnost:	HRN EN 12208:	klasa 9A
zaštita od buke:	HRN EN 4109:	31-47 dB (ovisno o staklu)
protuprovalnost:	HRN EN 1627:	WK2
otpornost na udar vjetra:	HRN EN 12210:	klasa C5/B5



SCHÜCO

Living 82 MD

- 7-komorni profil dizajniran sa optimiziranom geometrijom komora i dubinom ugradnje od 82 mm, pruža odličnu toplinsku izolaciju.
- koeficijent prolaza toplote $U_f 0,96 \text{ W / (m}^2\text{K)}$
- ispunjava uslove Instituta IFT Rosenheim u oblasti pasivne gradnje
- debljina stakla od 24 mm do 52 mm
- dihtung EPDM visoke kvalitete
- Povećana dubina ugradnje osigurava veću sigurnost i bolju zaštitu od provale
- odlična toplinska izolacija
- završna obrada Schüco AutomotiveFinish





SD 95

Tehničke karakteristike profila

- Dubina štoka 95 mm
- Dubina krila 95 mm
- Minimalna vidljiva širina (krilo+štok) 161,4 mm
- Minimalna vidljiva širina sa T profilom 106,4 mm
- Ograničenje nosivosti okova do 180 kg
- Debljina stakla do 60 mm
- Tip termičke izolacije poliamidi 34 mm

Svojstva ALUMIL SD 95

Maksimalna energetska efikasnost sa mogućnošću postizanja $U_f < 1,0 \text{ W/m}^2\text{K}$. Poliamidi koji apsorbiraju distorzije nastale zbog velikih temperaturnih razlika koje se javljaju vani i unutra. Neprekinuta centralna zaptivka duž čitavog obima vrata poboljšava izolaciona svojstva vrata (termička, hidro, vazдушna,...). Povećana zvučna izolacija. Izrada vrata velikih dimenzija. Mogućnost ugradnje klasičnih, skrivenih i „olovka“ šarki. Kompatibilan sa različitim tipovima sigurnosnih brava



Inowa /Klizno/

- Dubina okvira: 156 mm
- Dubina krila: 70 mm
- Dubina ispune: 18-57 mm
- $U_w \geq 1.2 \text{ W/m}^2\text{K}$

